

SFP+ 10G AOC 850nm

AS85113-CN-XXX

FEATURES

- Operating data rate 10.31Gb/s
- On OM3 MMF length up to x(x=0.5~300m)
- Active optical cable
- Hot pluggable SFP+ form factor
- Compliant with IEEE 802.3ae
- Operating case temperature 0°C ~70°C
- 3.3V single power supply
- Low power consumption <0.35W per end
- Compliant with RoHS 2.0
- Electrical interface compliant to SFF-8431
- 850nm VCSEL transmitter, PIN photo-detector receiver

APPLICATIONS

- 10 Gigabit Ethernet
- 1x Infini Band QDR. DDR, SDR
- High-performance computing clusters
- 4G and 8G Fibre Channel Applications
- Servers, switches, storage, host card adapters and data center

ORDERING INFORMATION

Part Number	Form Factor	Data Rate	Media	Distance (m)	Wavelength (nm)	Temperature (°C)
AS85113-CN- XXX	SFP+	10G	MMF	-	850	0~70

1 ABSOLUTE MAXIMUM PARAMETERS

Exceeding the limits below may damage the active optical cable permanently.

Parameter	Symbol	Min.	Max.	Unit.
Storage Temperature	Ts	-40	+85	°C
Relative Humidity	RH	0	95	%
Power Supply Voltage	VCC	-0.5	+4	V

2 . RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Min.	Typ.	Max.	Unit.
Case Operating Temperature	TA	0		70	°C
Power Supply Voltage	VCC	3.13	3.3	3.47	V
Power Consumption(per end)		-		0.35	W
Data Rate	DR		10.31		Gbps
Data Speed Tolerance	ΔDR	-100		100	ppm

3 . OPTICAL CHARACTERISTICS

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Transmitter						
Center Wavelength	λ_c	840	850	860	nm	
Extinction Ratio	ER	3.5			dB	
Average optical Power	Pavg	-6		0.6	dBm	
Rise/Fall Time	Tr/Tf			50	ps	
Relative Intensity Noise	Rin			-128	dBc/Hz	
Optical Return Loss	TOL			12	dB	
Transmitter Reflectance	RT			-12	dB	
Receiver						
Center Wavelength	λ_c	840	850	860	nm	
Overload, each lane	OVL	-1			dBm	
Receiver Sensitivity in OMA,each Lane	SEN			-11	dBm	


4 . PIN DESCRIPTIONS

Pin	Symbol	Name/Description	Notes
1	VeeT	Transmitter Ground	1
2	Tx Fault	Transmitter Fault Indication	2
3	Tx Disable	Transmitter Disable	3
4	SDA	Module Definition 2	4
5	SCL	Module Definition 1	4
6	MOD-ABS	Module Definition 0	4
7	RS0	RX Rate Select (LVTTL).	5
8	LOS	Loss of Signal	6
9	RS1	TX Rate Select (LVTTL).	5
10	VeeR	Receiver Ground	1
11	VeeR	Receiver Ground	1
12	RD-	Inv. Received Data Out	
13	RD+	Received Data Out	
14	VeeR	Receiver Ground	1
15	VeeR	Receiver Ground	
16	VccT	Transmitter Power	
17	VeeT	Transmitter Ground	1
18	TD+	Transmit Data In	
19	TD-	Inv. Transmit Data In	
20	VeeT	Transmitter Ground	1


Notes:

1. Circuit ground is internally isolated from chassis ground
2. TFAULT is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to Vcc + 0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8 V
3. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V
4. Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 3.6V. MOD_ABS pulls line low to indicate module is plugged in
5. Rate select can also be set through the 2-wire bus in accordance with SFF-8472 v. 12.1C. Rx Rate Select is set at Bit 3, Byte 110, Address A2h. Tx Rate Select is set at Bit 3, Byte 118, Address A2h. Note: writing a “1” selects maximum bandwidth operation. Rate select is the logic OR of the input state of Rate Select Pin and 2-wire bus
6. LOS is open collector output. Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal

5 . PIN DIAGRAM

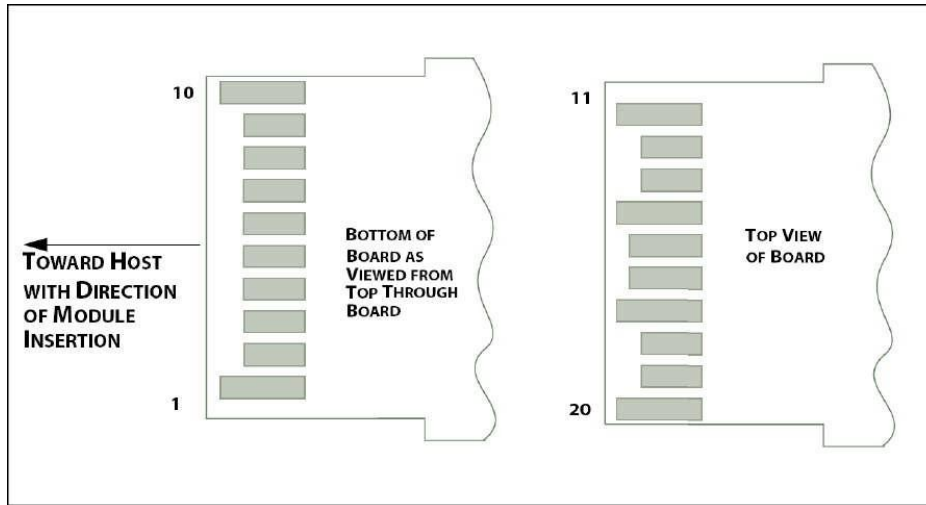

6 . Mechanical Design Diagram

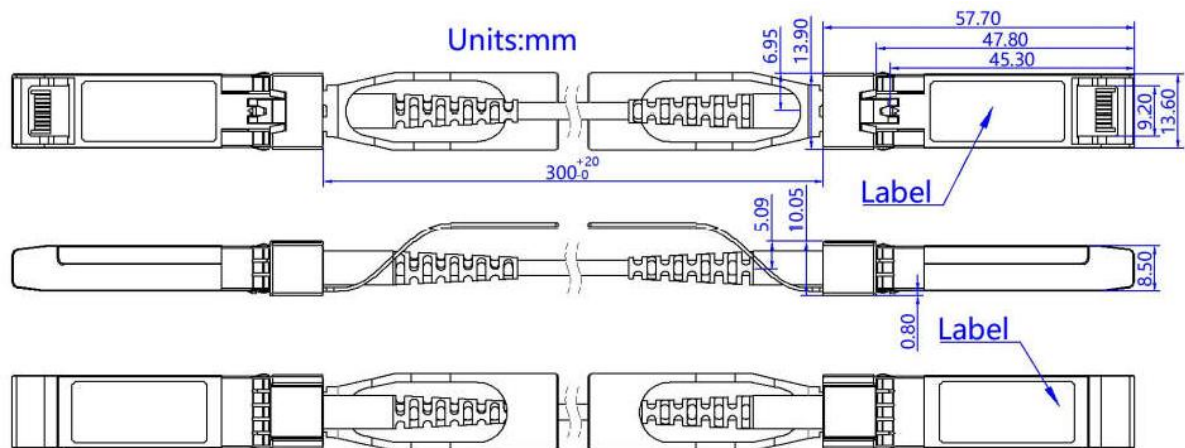

7 . LABEL DIAGRAM



AS85113-CN-XXX

SFP+ 10G AOC 850nm

Class 1 Laser
MADE IN CHINA

S/N: ??????????



X.XX.XX.XXX