


FO passive components

Optowire SC/UPC Pigtail, G657A2, Singlemode, LSZH

- LSZH Flame-retardant Fiber Optic Cable with Tight-buffered Coating on Each Optical Fiber.
- G.657.A2 Bend Insensitive Fiber & 10mm Min. Bend Radius.
- Optical Testing Guarantees Insertion Loss and Returns Loss.
- Support Both Fusion and Mechanical Splicing for Fiber Cabling Systems Returns Loss.

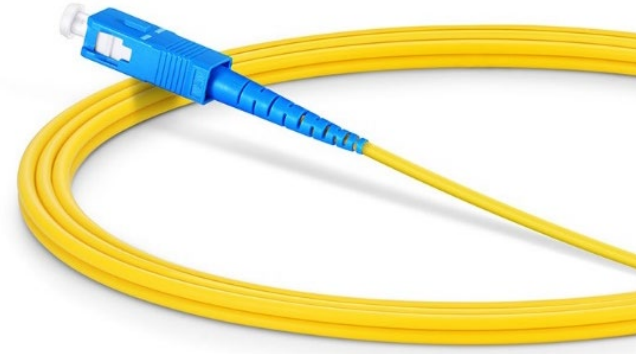

TECHNICAL SHEET

Connector A	SC	Connector B	Unterminated
Fiber Mode	9/125 μm	Fiber Count	Simplex
Fiber Grade	G.657A2	Minimum Bend Radius	10 mm
Polish Type	UPC	Cable Diameter	2.0 mm
Cable Jacket	LSZH	Jacket Color	Yellow
Wavelength	1310 nm/1550 nm	Durability	500 Times
Insertion Loss	≤0.3 dB	Interchangeability	≤0.2 dB
Return Loss	≥50 dB	Vibration	≤0.2 dB
Operating Temperature	-40~75°C	Storage Temperature	-45~85°C