


FO passive components

Optowire SC/APC-LC/UPC Patch cord 2.0mm G657A2 LSZH simplex

- G.657.A2 Bend Insensitive Fiber & 10mm Min. Bend Radius
- Precision Zirconia Ferrule Connectors Ensure Low Loss
- LSZH Environmentally Friendly Jacket
- Optical Testing Ensures Network Performance
- Length – Customized

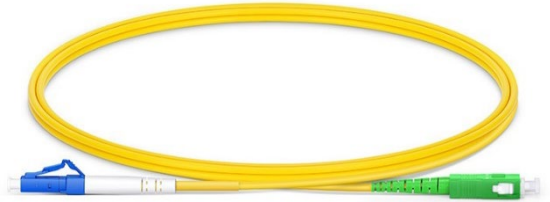

TECHNICAL SHEET

Connector A	SC/APC	Connector B	LC/UPC
Fiber Mode	OS2 9/125μm	Fiber Count	Simplex
Fiber Grade	G.657.A2	Minimum Bend Radius	10mm
Cable Diameter	2.0 mm	Return Loss APC	\geq60dB
Cable Jacket	LSZH	Return Loss UPC	\geq50dB
Wavelength	1310/1550nm	Attenuation at 1310nm	0.36 dB/km
Insertion Loss	\leq0.3 dB	Attenuation at 1550nm	0.22 dB/km
Operating Temperature	-20~70°C	Storage Temperature	-40~80°C