

Distribution Terminal box: YTDB-1M96A

Overview

YTDB-1M96A fiber optics distribution box is currently being widely used for distributing outdoor optical cable in indoor conditions.


It is very suitable for FTTx uses. This box offers ideal environment for fibers to be spliced and well organized under indoor environment.

Features

- The box has functions of cable termination, splicing, distribution and cross-connection.
- Solid structure with the advantages of good performance of dust-proof, pleasing and neat appearance.
- Easy installations: Wall mountable.
- Ideal for indoor uses – cable entrances & exits located on both top and bottom.
- Lock provided on every box ensures the safety of the fibers.
- The central adapter board separates the incoming cables and the exiting fibers
- Adoptable adapter types: SC, LC/Duplex



For Cross-Connect.

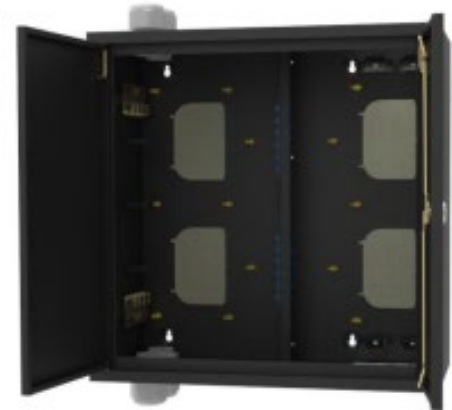

Dimensions and Capacity

Type	Dimensions (W*D*H)mm	Capacity
For Cross Connect (SC)	600*150*600	24
For Cross Connect (LC)	600*150*600	48
For Shell and Core buildings (SC)	600*300*600	48
For Shell and Core buildings (LC)	600*300*600	96

• Customized designs available upon request.





Operation Conditions

Temperature	Humidity	Air Pressure
-30°C - 75°C	≤90% (at 30 °C)	70kPa - 106kPa





Packing

Package Contents	Humidity
Mini ODF, 1 unit; Installation accessories, 1 set	Carton box

Technical Drawing

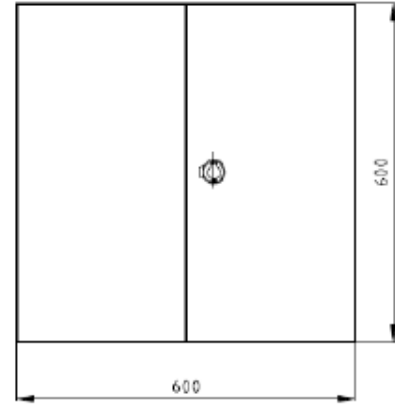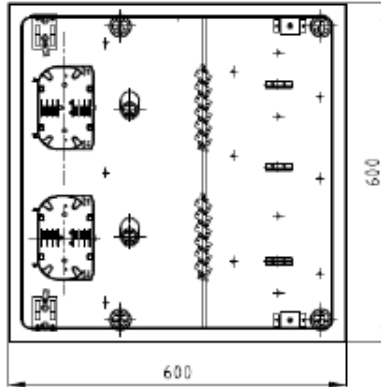

				Name.		Number.		
				MiniODF LC				
				600×600×150				
Mark	Number	Sign	Date			Design Mark	Weight	Scale
								1:1

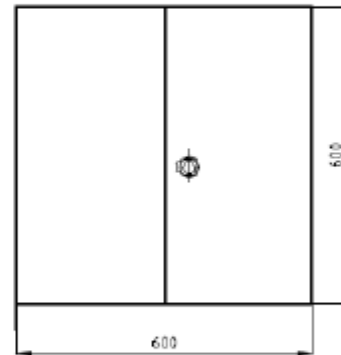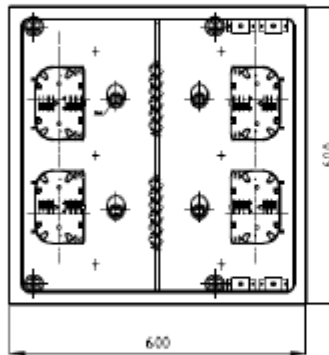

				Name.		Number.		
				MiniODF LC				
				600×600×300				
Mark	Number	Sign	Date			Design Mark	Weight	Scale

More Details

