


Optowire Fitting Tools

Attachment point YK-H-02

The c-type hook is used as an accessory for outdoor or indoor wall fiber access.

The main purpose is to form an anchor on the wall for the erection and support of the fiber. The hanging part rotates more than 180 degrees, so the wire body It can only be detached manually, and the thread body will not decouple even in a strong wind environment.

C-type hook specifications: length 7cm, width: 2.7cm, thickness: 4mm, the surface is hot-dip galvanized, and the groove and base are fixed by riveting.

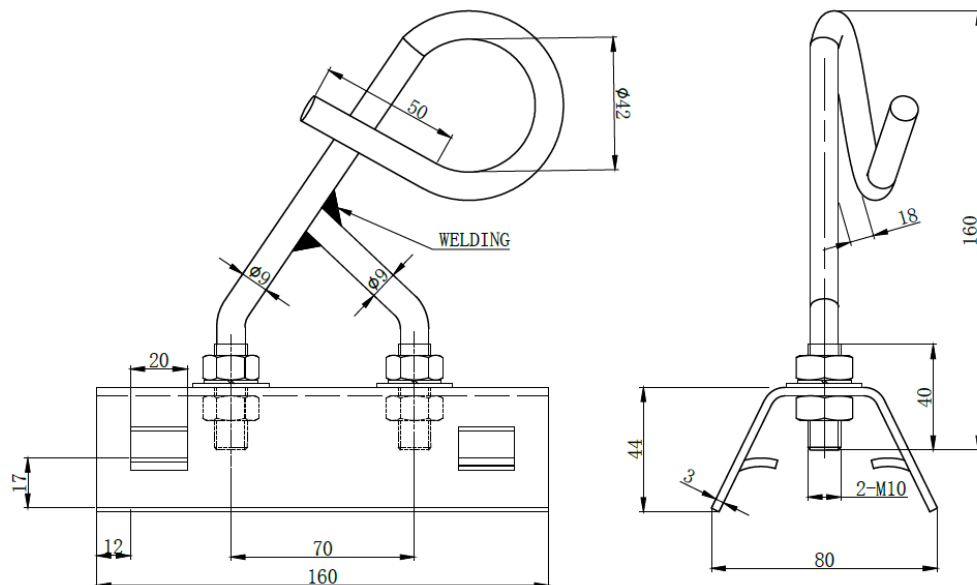

TECHNICAL SHEET

DESCRIPTION	DATA
Material	Q235 steel
Treatment surface	Hot dip galvanized
Base Width (mm)	80
Base Thickness (mm)	3
Base length (mm)	160
Hook diameter (mm)	Φ9
Unit weight (kg)	0.72