


## Distribution Terminal box: YTDB-1MS216A

### Overview

YTDB-1MS216A wall mountable outdoor splice box is very suitable for FTTx uses. It provides a high-density splicing system with fiber management saves space and ensures all the fibers and cables are well organized.

### Features

- The box has functions of cable splicing and patching.
- Solid structure with the advantages of good performance of dust-proof, pleasing and neat appearance.
- High density up to 216 cores splicing.
- Two cable glands and one big cable entry on both top and bottom.
- Easy installations: Wall mountable.
- Ideal for indoor uses – cable entrances & exits located on both top and bottom.
- Lock provided on every box ensures the safety of the fibers.
- The central adapter board separates the incoming

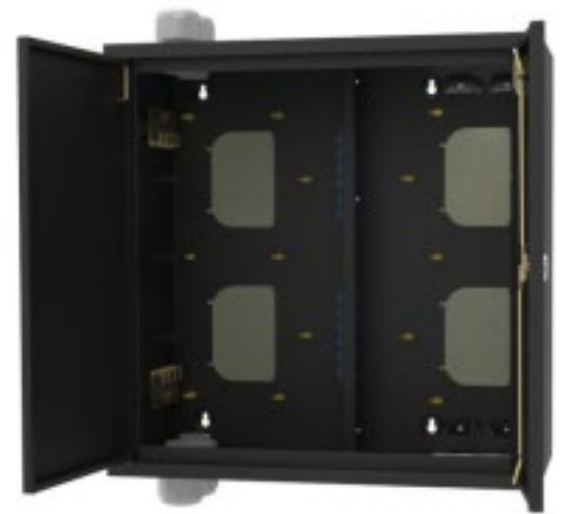

## Dimensions and Capacity

Type	Dimensions (W*D*H)mm	Capacity
Splice Box	600*300*600	216

- Customized designs available upon request.






## Operation Conditions

Temperature	Humidity	Air Pressure
-30°C - 75°C	≤90% (at 30 °C)	70kPa - 106kPa

## Packing

Package Contents	Humidity
Mini ODF, 1 unit; Installation accessories, 1 set	Carton box

## Technical Drawing

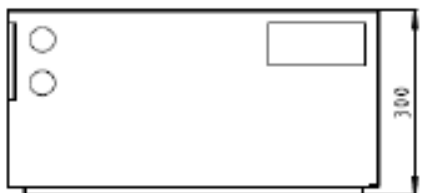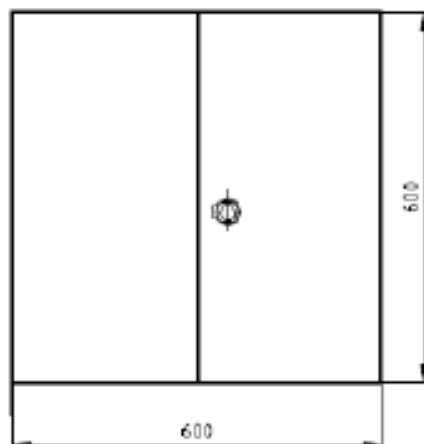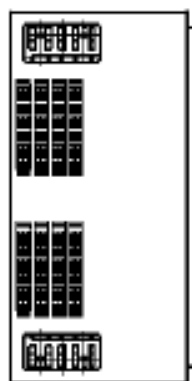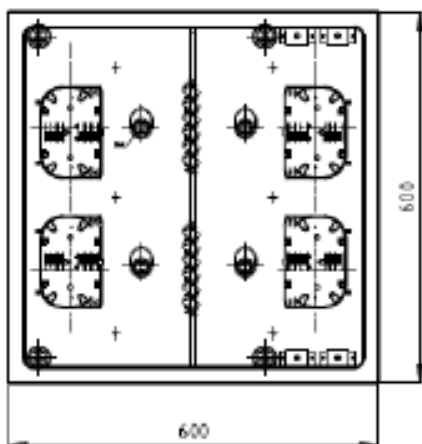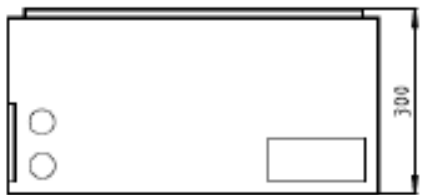

				600×600×300	Number.	
Mark	Number	Sign	Date		Design Mark	Weight g

More Details

